

LED Direct/Indirect Panel Court Fixture



The Energywise Direct/Indirect Panel Court Fixture is designed for indoor court environments looking for an indirect lighting application to eliminate direct exposure to glare. Designed to produce 100% of its light directly upwards, it effectively illuminates the entire space via its' reflective optics.

With optics packages as high as 53,000 lumens, it is controls ready, BBA and BABA compliant, offering maximum flexibility and performance for sports courts, gymnasiums, and other high-ceiling indoor environments. Suited for suspension mounting with an adjustable cable or pendant mounting options.


SPECIFICATIONS



PART #	EWXTLED-HB-INDIRECTCOURT
SIZE	24 - 47 "
FIXTURE COLOR	WHITE
WATTAGE	63W - 322W
INPUT VOLTAGE	120V - 277V
LUMENS	9,000 - 53,000 LUMENS
DIMMING	0-10V
CCT	30K / 35K / 40K / 50K
BATTERY BACKUP	EMB OPTION
ENVIRONMENT	DAMP LOCATION RATED
LIFESPAN	> 102,000 HOURS
WARRANTY	5 YEARS
BEAM ANGLE	15/60/90 DEGREES
MOUNTING	PENDANT MOUNT - 10ft SO Cord & AIRPLANE CABLE STANDARD (EXTENDER OPTIONS AVAILABLE)

LED Indirect Panel Court Fixture

ISO LINES

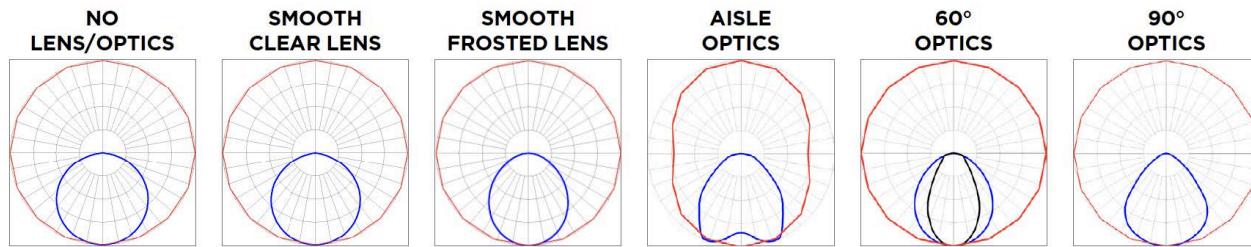


• Red: Horizontal Cone Through Vertical Angle (0) / Blue: Vertical Plane Through Horizontal Angles (0-180) / Black: Vertical Plane Through Horizontal Angles (90-270)


DIMENSIONAL DATA

STANDARD SIZES


10000L MODEL




15000L - 20000L MODELS



25000L MODEL

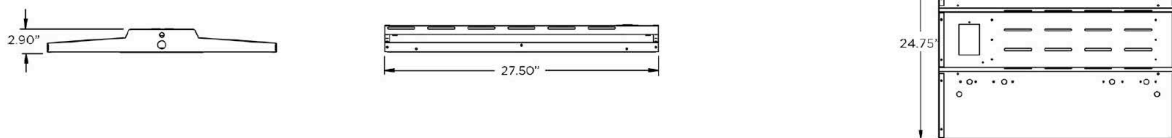

30000L - 50000L MODELS

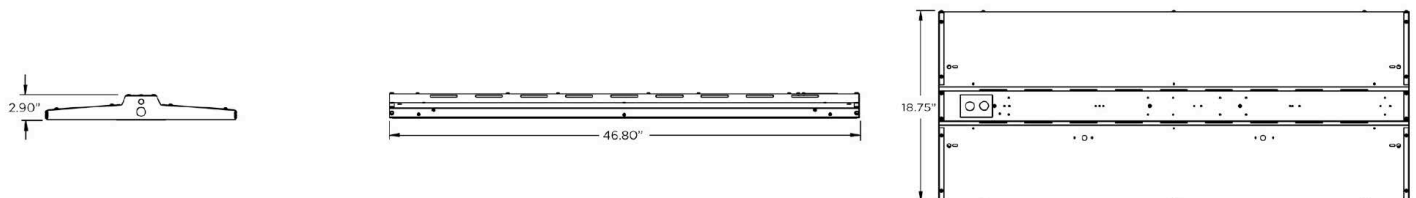


LED Indirect Panel Court Fixture

DIMENSIONAL DATA OPTION MODIFICATIONS


STANDARD SIZES

PND

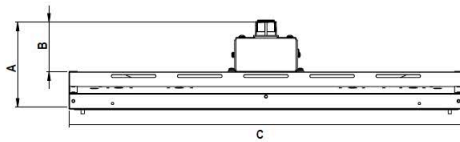


DIMENSIONS	A	B	C
10000L	5.5" (139.7mm)	2.9" (73.5mm)	24.0" (609.6mm)
15000L-20000L	5.6" (142.3mm)	2.9" (73.5mm)	24.0" (609.6mm)
25000L	5.8" (147.3mm)	2.9" (73.5mm)	27.5" (698.5mm)
30000L-50000L	5.8" (147.3mm)	2.9" (73.5mm)	46.8" (1188mm)
65000L-70000L	5.8" (147.32mm)	2.9" (73.5mm)	46.8" (1188mm)

WG



DIMENSIONS	A	B	C
10000L	3.0" (76.2mm)	0.5" (12.7mm)	24.0" (609.6mm)
15000L-20000L	3.9" (99.1mm)	1.2" (30.5mm)	24.0" (609.6mm)
25000L	3.6" (91.4mm)	0.7" (17.8mm)	27.5" (698.5mm)
30000L-50000L	3.5" (88.9mm)	0.6" (15.2mm)	46.8" (1188mm)
65000L-70000L	4.1" (104.14mm)	0.6" (15.2mm)	46.8" (1188mm)

SENSOR

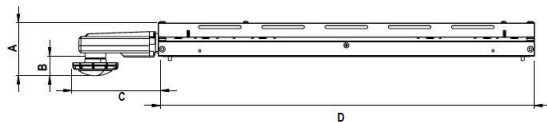

DIMENSIONS	A	B	C	D
10000L	3.7" (93.9mm)	1.2" (30.5mm)	5.4" (137.2mm)	24.0" (609.6mm)
15000L-20000L	3.9" (99.1mm)	1.2" (30.5mm)	5.4" (137.2mm)	24.0" (609.6mm)
25000L	4.1" (104.1mm)	1.2" (30.5mm)	5.4" (137.2mm)	27.5" (698.5mm)
30000L-50000L	4.1" (104.1mm)	1.2" (30.5mm)	5.4" (137.2mm)	46.8" (1188mm)
65000L-70000L	4.7" (119.38mm)	1.2" (30.5mm)	5.4" (137.2mm)	46.8" (1188mm)

ACCESSORIES (SOLD SEPARATELY)

ADJUSTABLE CABLE

MS0199	5 FT
MS0214	10 FT
MS1680	15 FT
MS1716	20 FT

DESCRIPTION

- Adjustable cable for use with existing SHB mounting provisions.
- Tool-less adjustment and reduced installation time.



INVERTED FOR INDIRECT ILLUMINATION

